

University Loft Company



DOORS CATALOG

Structure



8mm fireproof glass
GL150



50/60mm door leaf
F20 0.8-1.5mm Galvanized steel
Pearlite filling
See filling option



F20 1.2-2.0mm Galvanized steel
with fire strip
and Sound-proof anti-collision seal



Door Closer C60
More than 5 million
opening lifespan



High quality
304# fire Lock



230° high-temperature
powder coated finish

Filling Option



Fire Plate
FD90.610,FD120.690,FD180.850



Perlite Board
FD30.420,FD60.560



Rockwool
FD30.60.90.120



Foam Board
FD00.400




Paper Honeycomb
FD00.390




Aluminum Honeycomb
FD00.400


Frame Type

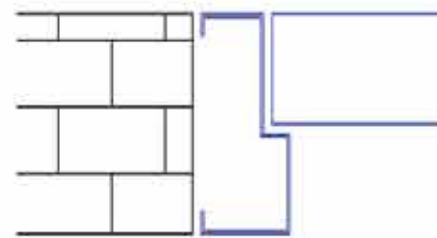

Frame A 00

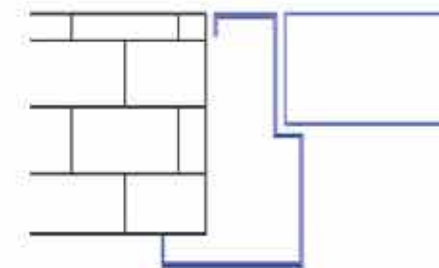

Frame B 30

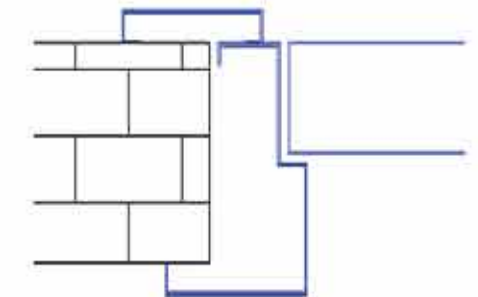

Frame C 80

Fire testing



DJMI fire steel door



1000°C+ fire testing



FS-01
SSD150 SSD150



FS-02
P350



FS-03



FS-04
C60



FS-05
G150



FS-06
C60 G150 SD100



FS-07
G300



FS-08
G500



FS-09
C60 G300



FS-10
L150



FS-11
T150



FS-12
C60 T300



3 Panel
Frosted Glass



FS-14
G150 T150



FS-15
C60 G150 T300



FS-16
C60 G200



FS-17
C60 G200 G150



FS-18
C60 G300 G150 SD150



FS-19
C60*2 G200*2



FS-20



FS-21



FS-22
C60 G150



FS-23
C60*2 G150*2




Sliding
Glass Door



FS-25
C60*2 G150*2 T300*2



Bifold
Glass Door

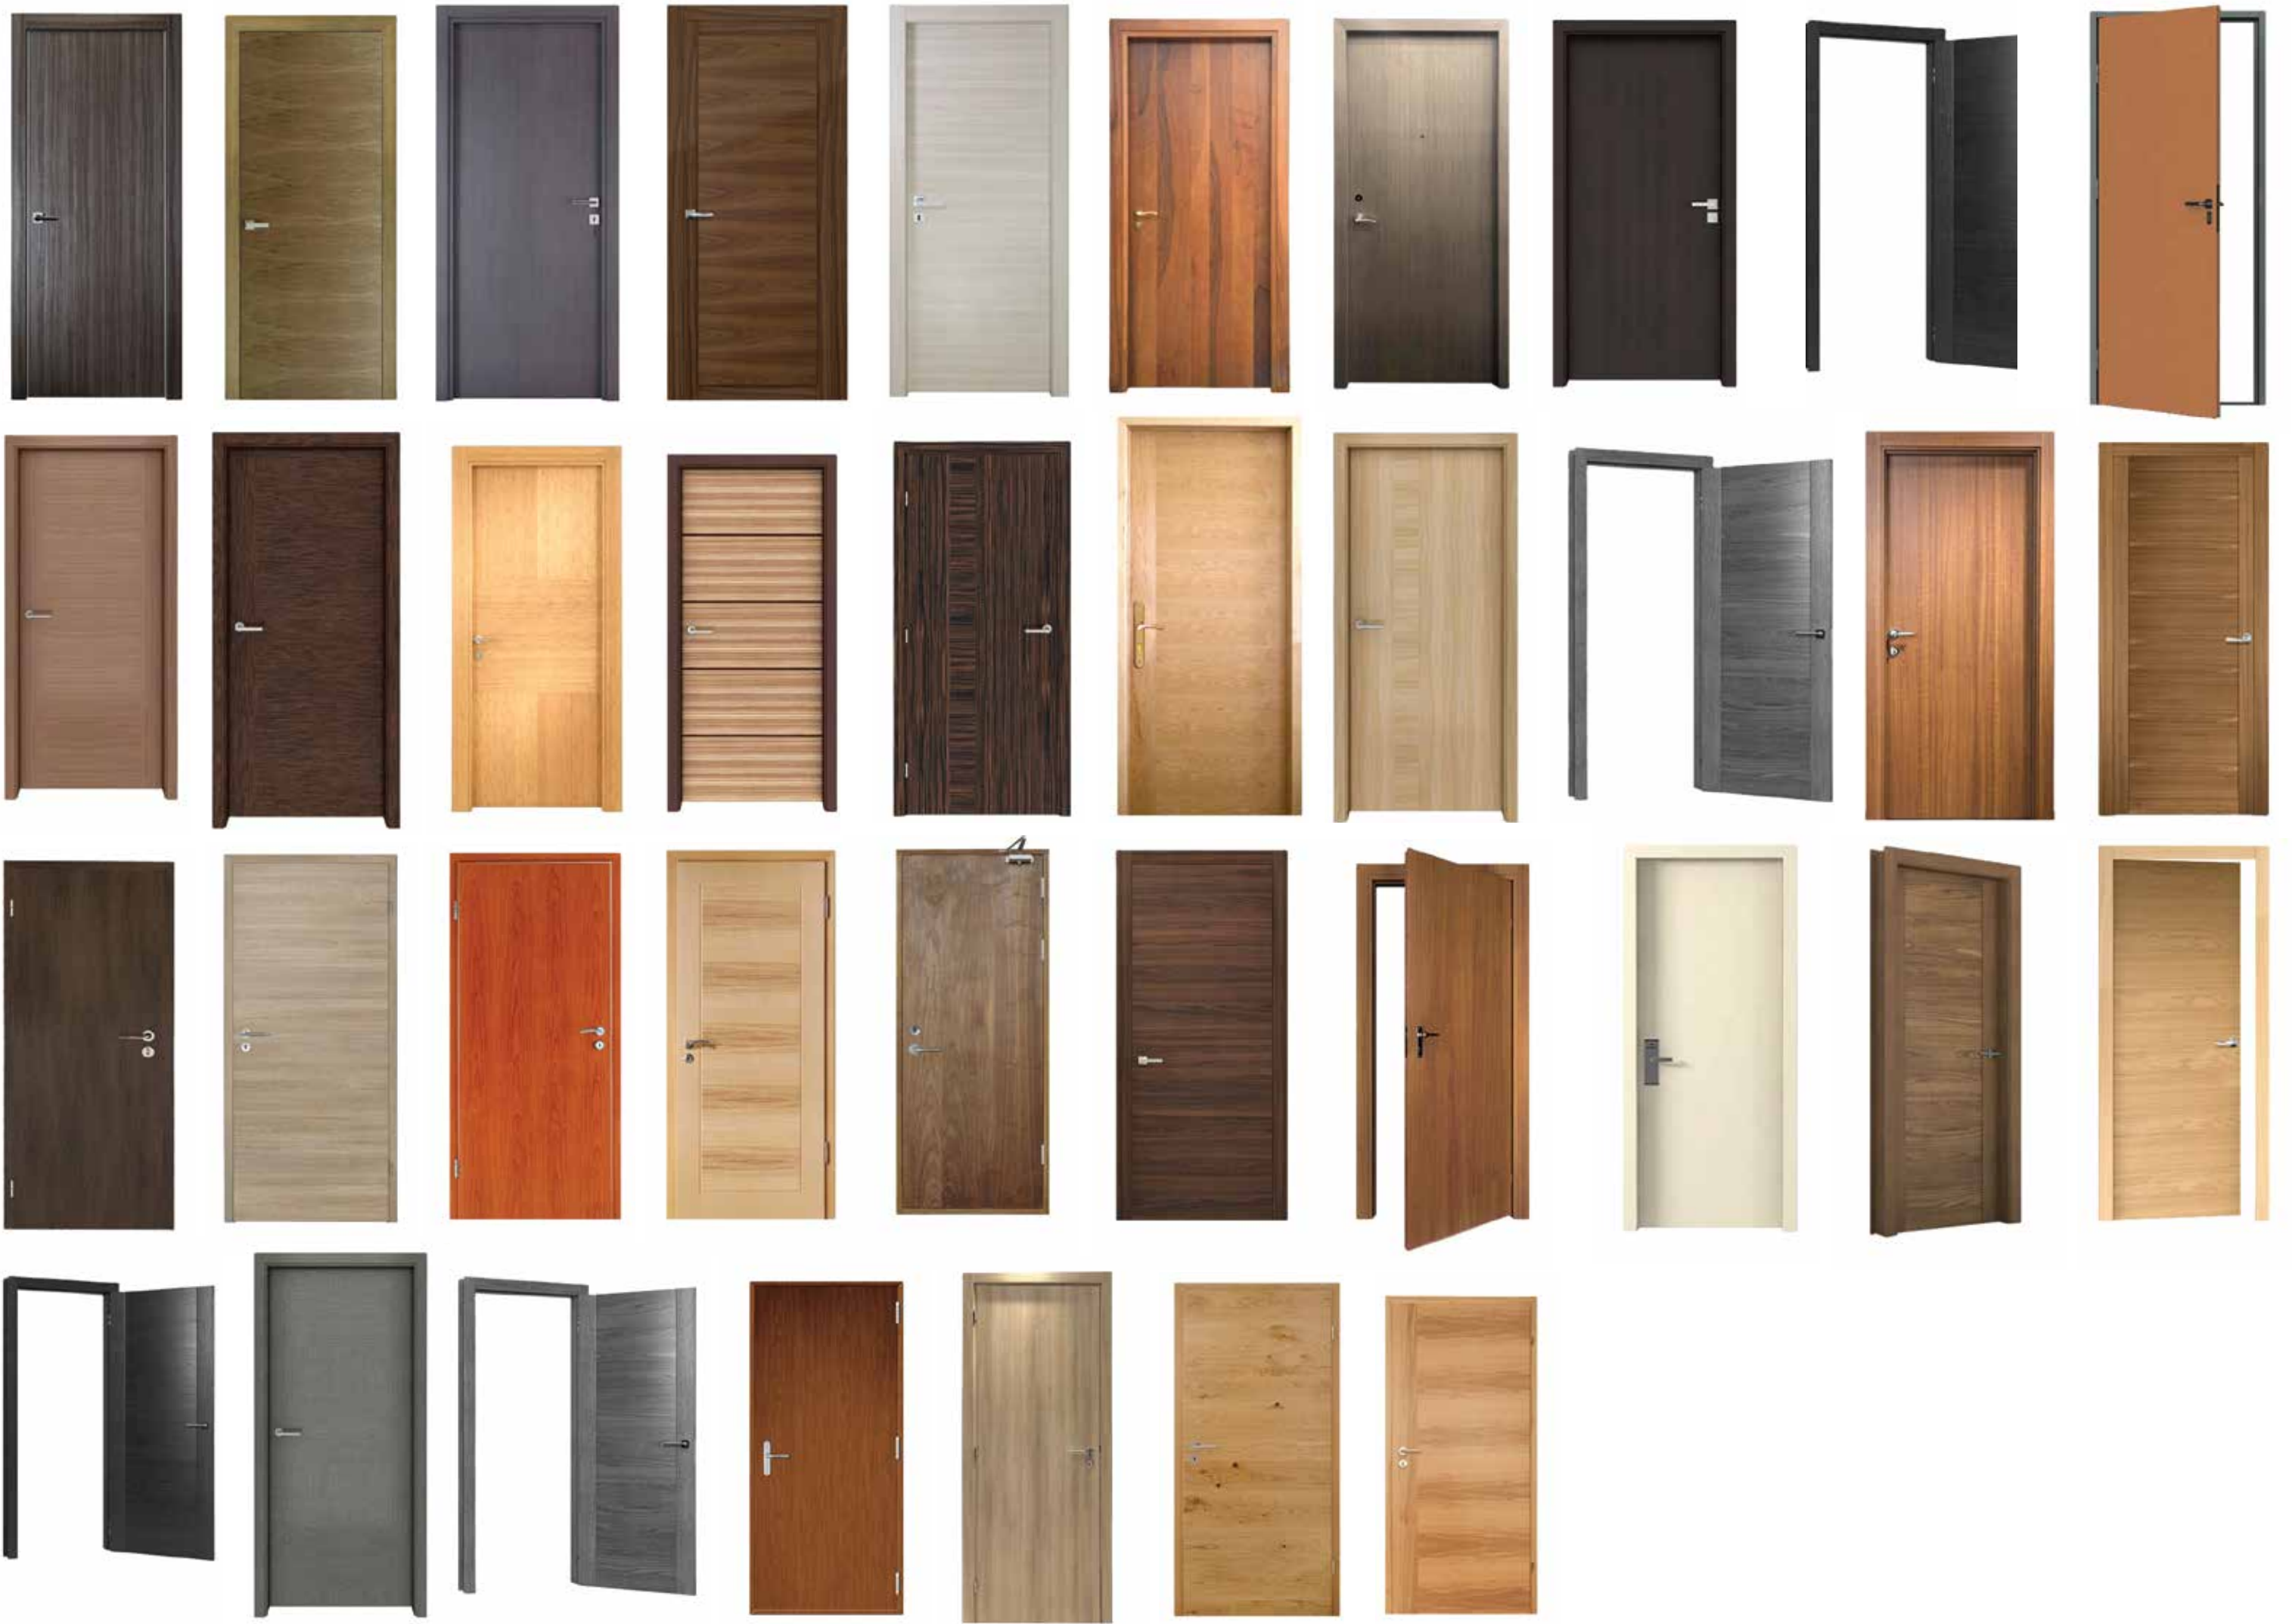

STANDARD COLOUR



White 纯白



Light Grey 10213



RAL 9002



JS Grey 厂爵士灰



TH Blue 厂碳灰蓝



BM Grey 宝马灰



GL Brown 厂橄榄棕



BS Blue 厂宝石蓝



R50 厂美洲红檀



S50 厂银橡木纹



W50 10215/663



RB1000 厂红古铜



GB1000 厂金古铜

CUSTOMIZED COLOUR



RAL 2007



RAL 3002



RAL 6037



RAL 5012

HARDWARE



Fire Lock



Channel Lock



Tube Lock



Push Panic Lock
P350a



Push-down Panic Lock
P350b



Door Closer
C50




Door Closer C60



PULL/Push Handle
H50



304# Hinges

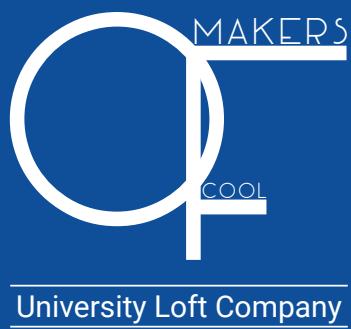

2588 JANNETIDES BLVD., GREENFIELD, IN 46140 • WWW.ULOFT.COM • 800.423.LOFT

ULOFT.COM

